



Description

Optimized for ESD plastics with excellent performance and durability



Electrical specifications

Device type

RAIN RFID / EPCglobal Gen2v2

Operational frequency

ETSI 865 - 868 MHz
FCC 902 - 928 MHz

IC type

Impinj M780
496 bit EPC, 128 bit user, 96 bit TID

EPC memory content

Unique random 96 bit EPC

Applicable surface materials*

All surfaces, optimized for ESD plastics

Attachment on curved surface*

Label can be attached on a curved surface. Check installation instructions for more details.

Read range (2W ERP)*

	ETSI label	FCC label
On Metal	14m / 46ft	14m / 46ft
ESD Plastic	6m / 20ft	9m / 30ft
Plastic	6m / 20ft	6m / 20ft
Liquid container	5m / 16ft	8m / 26ft

* Read ranges are theoretical values that are calculated for non-reflective environment. Different surface materials may have an effect on performance.



Mechanical specifications

Tag materials

White PET with good printability. Resin ribbon recommended for best durability. High tack adhesive with excellent adhesion to all surfaces including ESD plastics.

Weight

1,5 g

Delivery format

300 pcs good labels on reel, bad ones marked with "XXX" printing.

Pitch on reel


38,1 mm / 1.5"

Reel core inner diameter

76 mm / 3"

Tag dimensions

70 x 30 x 1,3 (mm)
2.76 x 1.18 x 0.05 inch

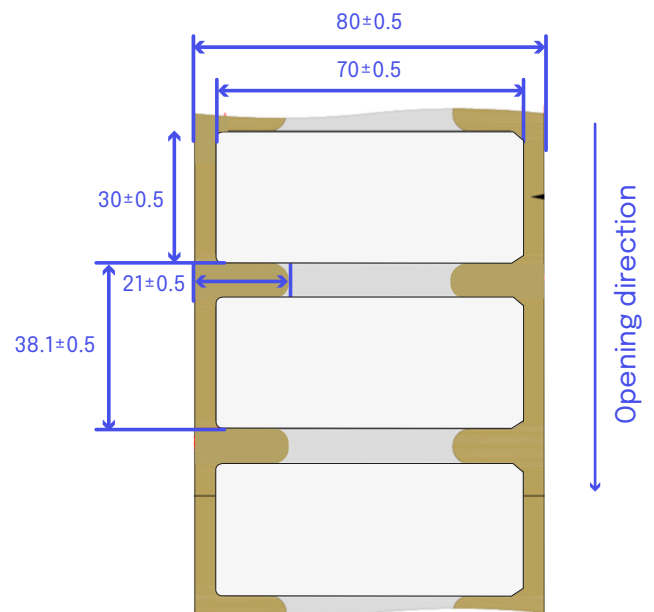



Environmental resistance

Operating temperature

-40°C to +85°C / -40°F to +185°F

Peak temperature

+110°C / 230°F for 10min

Ip classification

IP68, tested for 5 hours in 1m deep water

Chemical resistance

No physical or performance changes in:

- 168h Motor oil
- 168h Salt water (salinity 10%)
- 168h Sulfuric acid (10%, pH 2)
- 30min NaOH (10%, pH 13)

Storage condition

1 year in +20°C / 50% RH

Other comments

Tolerates industrial washing with standard solvents. Washing durability is recommended to be tested in the final application.

Environmental values are the best recommendations; resistance against different conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested.



Personalization options

Pre-encoding

On request

Visual marking

B&W printing on request



Printer Compatibility

The Beontag ESD On Metal Label is tested and verified to work with the following printers:

- Zebra ZT411 On Metal
- Zebra ZT410 Silverline
- Sato CL4NX
- Printronix Auto ID T6000e
- Printronix Auto ID T4000

For printing instructions please contact Beontag.



Installation instructions



When attaching the label ensure the following

- Select a smooth surface without uneven areas below tag
- Avoid touching the background adhesive and IC location


When mounting the label with its adhesive, clean and dry the surface for obtaining the maximum bond strength. Typical cleaning solvents are heptane or acetone for oily surfaces or isopropyl alcohol for plastics. Do not use household cleaning solvents that contain oils. Carefully read and follow the manufacturer's precautions and directions for use when working with solvents.

Ideal application temperature is from +21°C to +38°C (+70°F to +100°F). Bond strength can be improved with firm application pressure and moderate heating up to +54°C (+130°F). Application at temperatures below 10°C (50°F) is not recommended.

Optimal read range is achieved when label is attached close to the edge of metal asset, like shown in below picture.



Smallest recommended bending diameter of the **Beontag ESD On Metal Label** is 100mm. For optimal performance please bend the label in the orientation shown below.

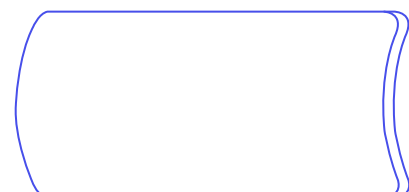



Order information

Product number: **3005380**

Product name: **ESD on metal label 70x30 M780 ETSI**

Product number: **3005552**

Product name: **ESD on metal label 70x30 M780 FCC**

Protective over-lamination: Contact Beontag for item details.

For additional information and technical support, please contact Beontag.

DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, BEONTAG AND ITS AFFILIATES MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN BEONTAG STANDARD CONDITIONS OF SALE, BEONTAG AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Beontag products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Beontag products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Beontag.

About Beontag

From the science of graphic and label materials, RFID and wireless IoT enablers, we create solutions across the value chain to deliver digital transformation for businesses around the world.

Sustainability is at the core of what we do and we strongly believe that by substituting non-renewable materials and innovating through more sustainable and renewable products, we act as an ESG enabler for our customers' value chain.

Beontag is one of the world's leading providers of RFID and wireless IoT solutions, being present in more than 40 countries with 7 R&D centers and 2,000 employees, in constant development of technological and sustainable solutions designed to connect items, and gain efficiency and end-to-end traceability

CONTACT US FOR
MORE INFORMATIONS:
beontag.com

The performance of the product should always be tested in the actual application conditions. Our recommendations are based on our most current knowledge and experience and the pictures and illustrations presented in this document are for illustration purposes only. As our products are used in conditions beyond our control, we cannot assume any liability for damage caused through their use. Beontag reserves the right to change its products and services at any time without notice.

