



## Description

Ferrowave Micro is optimized for item-level, high volume tracking of specialty retail categories such as sports equipment, beauty and personal care items and also serves as brand authentication for high value goods.



## Electrical specifications

### Device type

RAIN RFID / EPC global Gen2v2

### Operational frequency

ETSI: 865 - 868 MHz  
FCC: 902-928 MHz

### IC options and memory configurations

NXP UCODE 9  
96 bit EPC memory, 96 bit TID

### EPC memory content

Unique random 96 bit EPC

### Read range (2W ERP)\*

On metal up to 5,5m / 18 ft

### Applicable surface materials\*

Optimized for metal but works on any surface

\* Read ranges are theoretical values that are calculated for non-reflective environment, in where antennas with optimum directivity are used with maximum allowed operating power according to ETSI EN 302 208 (2W ERP). Performance may vary depending on surface materials.



## Mechanical specifications

### Label surface

Printable white PET, resin ribbon recommended

### Delivery format

800 pcs good labels on reel, bad ones marked with "XXX" printing.

### Background adhesive

Acrylic adhesive optimized for metal and painted metal surfaces

### Pitch on reel

20,32 mm / 0.8"

### Reel core inner diameter



76 mm / 3"

### Weight

0,25 g

### Tag dimensions

58 x 6 x 1,3 mm

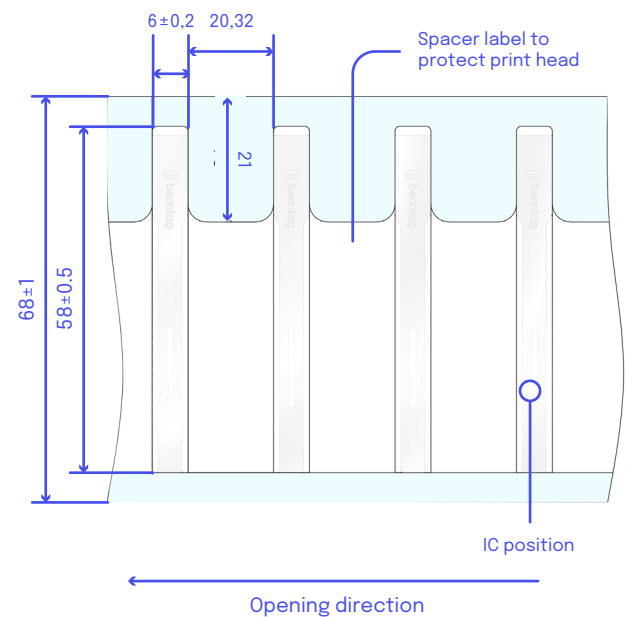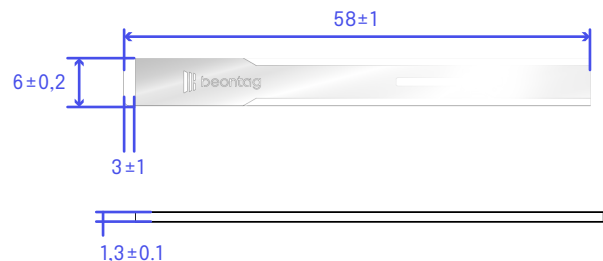

## Printer Compatibility

Beontag Ferrowave Micro™ is tested to work with the following printers:

- Zebra ZT411 On Metal
- Sato CL4NX
- Printronix Auto ID T6000e

For printing instructions please contact Beontag



## Environmental resistance

### Operating temperature

-35°C to +85°C / -31°F to +185°F

### IP classification

IP68, tested for 5 hours in 1m deep water

### Storage condition

1 year in +20°C / 50% RH

### Expected lifetime

Years under normal operating conditions

### Other comments


Tolerates industrial washing with standard solvents. Washing durability is recommended to be tested in the final application.

Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Beontag for more specific information.




## Installation instructions

### Tag polarization



When mounting the label with its adhesive, clean and dry the surface for obtaining the maximum bond strength. Typical cleaning solvents are heptane or acetone for oily surfaces; or isopropyl alcohol for plastics. Do not use household cleaning solvents that contain oils. Carefully read and follow the manufacturer's precautions and directions for use when working with solvents.


Ideal application temperature is from +16°C to +38°C (+60°F to +100°F), bond strength can be improved with firm application pressure and moderate heating from +38°C to +54°C (+100°F to +130°F). Application at temperatures below 10°C (50°F) is not recommended. Final bond strength is achieved in 72 hours. Attachment on curved surface is highly recommended to be done along the asset, as shown in below drawing. This orientation would ensure better performance and adhesion.



For optimal read range it is important to test different placement of label on the actual asset. It is recommended to leave metal at least to non-folded end of the label as shown below.


When attaching the label, ensure the following:

- Select a smooth surface without uneven areas below tag
- Avoid touching the background adhesive and IC location

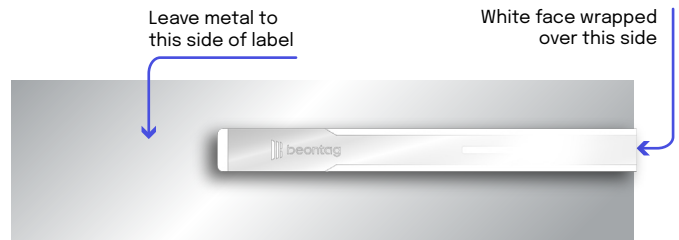

## Radiation pattern

Radiation pattern is heavily impacted by the shape and material of the tagged asset. Below pattern is measured on metallic plate. It is recommended to test the optimal positioning on an actual asset.

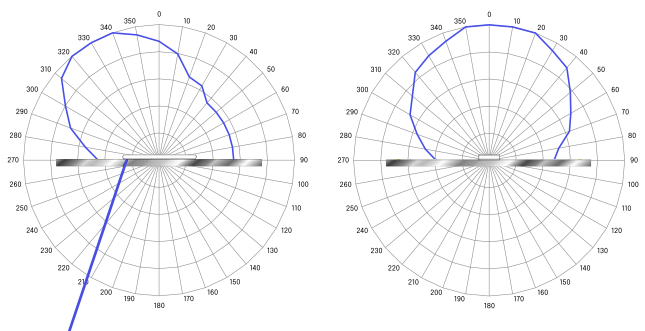

Folded end this side

# BEONTAG FERROWAVE MICRO REGIONAL



## Order information

Product number: **3004749**  
Product Name: **Beontag Ferrowave Micro U9 FCC**

Product number: **3004750**  
Product Name: **Beontag Ferrowave Micro U9 ETSI**

For other versions, additional information and technical support please contact Beontag.



## Personalization options

### Pre-encoding

On request

### Visual Marking

B&W printing on request

## DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, BEONTAG AND ITS AFFILIATES MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (I) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN BEONTAG STANDARD CONDITIONS OF SALE, BEONTAG AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Beontag products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Beontag products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Beontag.

## About Beontag

From the science of graphic and label materials, RFID and wireless IoT enablers, we create solutions across the value chain to deliver digital transformation for businesses around the world.

Sustainability is at the core of what we do and we strongly believe that by substituting non-renewable materials and innovating through more sustainable and renewable products, we act as an ESG enabler for our customers' value chain.

Beontag is one of the world's leading providers of RFID and wireless IoT solutions, being present in more than 40 countries with 7 R&D centers and 2,000 employees, in constant development of technological and sustainable solutions designed to connect items, and gain efficiency and end-to-end traceability.

CONTACT US FOR  
MORE INFORMATION:  
[beontag.com](https://www.beontag.com)

The performance of the product should always be tested in the actual application conditions. Our recommendations are based on our most current knowledge and experience and the pictures and illustrations presented in this document are for illustration purposes only. As our products are used in conditions beyond our control, we cannot assume any liability for damage caused through their use. Beontag reserves the right to change its products and services at any time without notice.

